



CONSTRUPISOS Y VINILOS SAS

Calidad y cumplimiento

**HOMOGENEOUS VINYL FLOORING
ANTI-STATIC**




FAVORITE ANTI-STATIC FLOOR COVERINGS /2.0



W212-004




W212-005

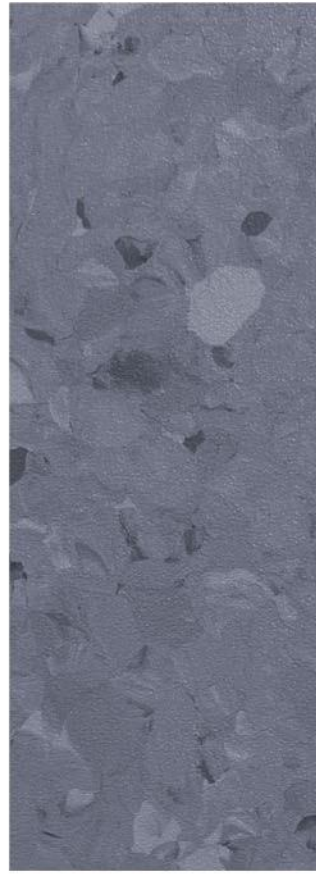

W212-011




W212-006

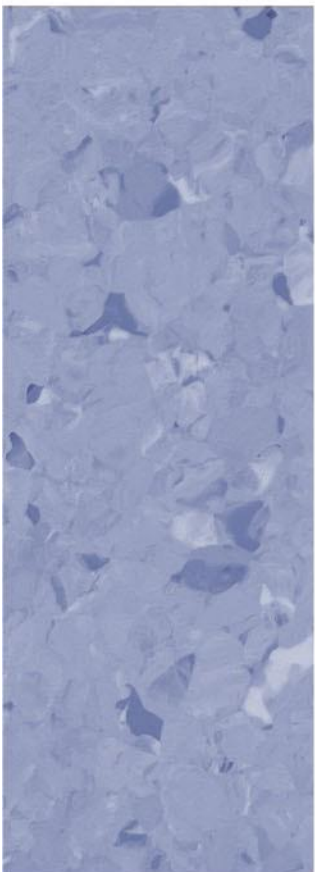

W212-007



W212-010

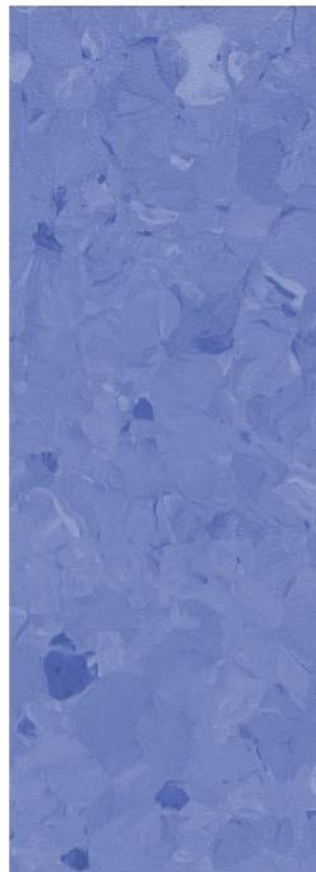


W212-009




W212-015




W212-013

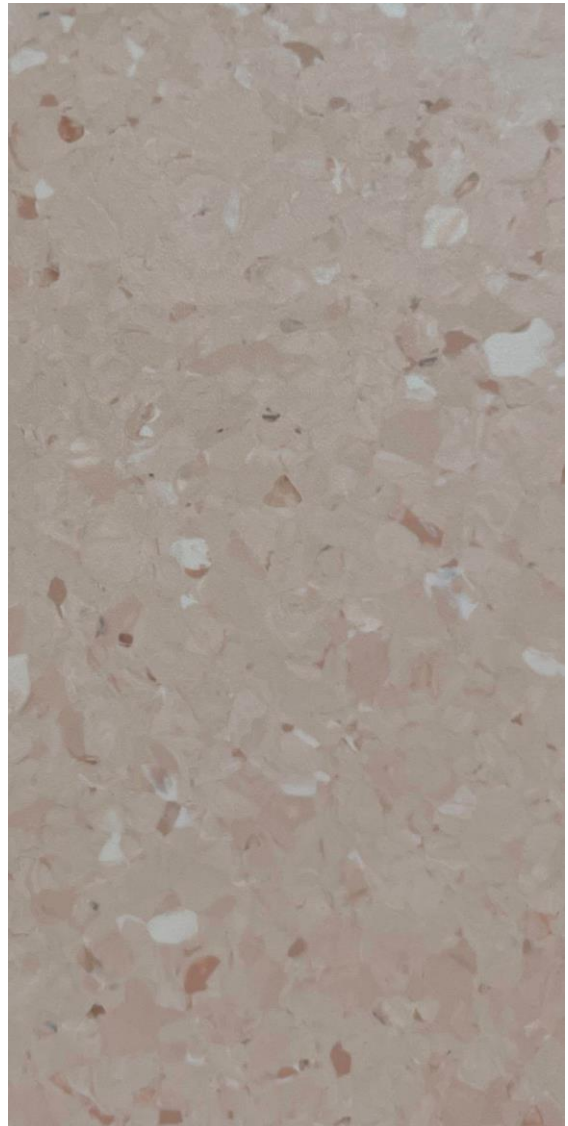


W212-012

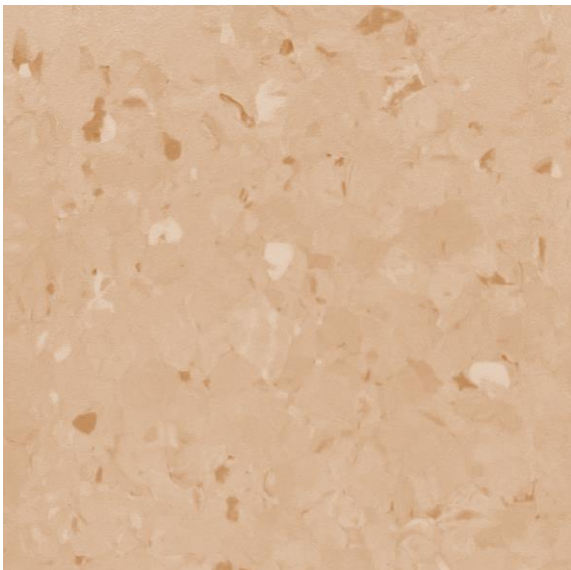


W212-014

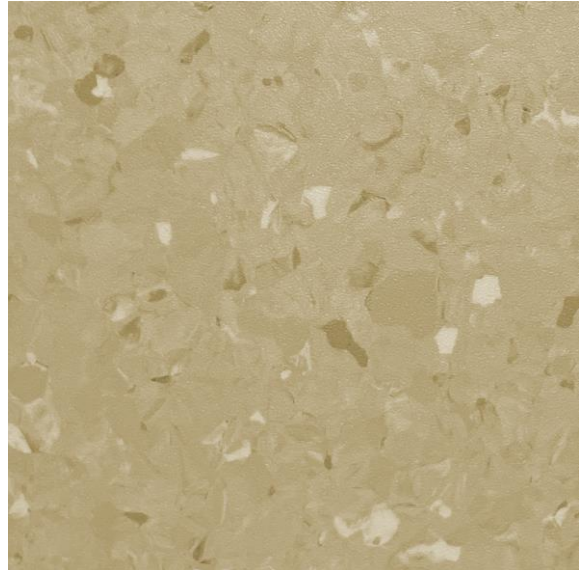

W212-003

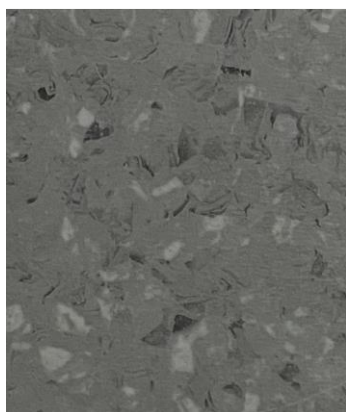


FA-3001

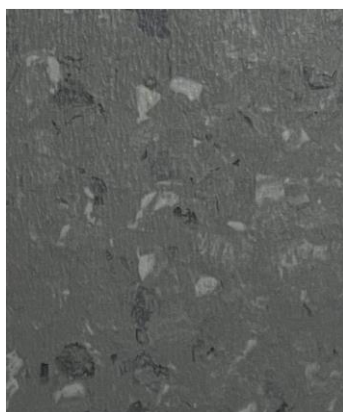

FA-3031




FA-3005

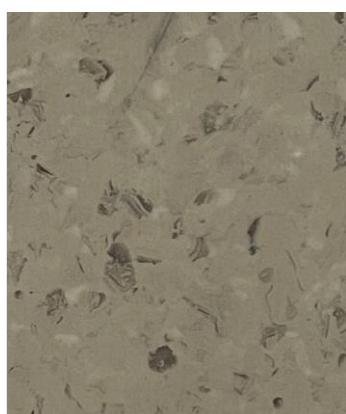


FA-3027



FA-3006

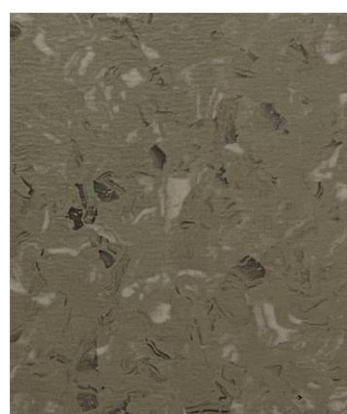

FA-3007

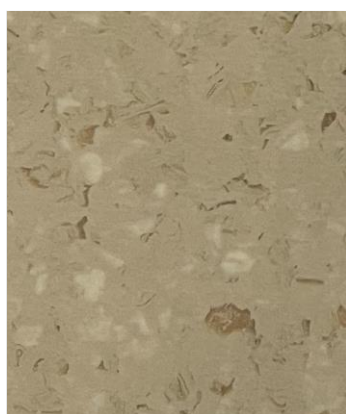


FA-3010




FA-3022




FA-3029

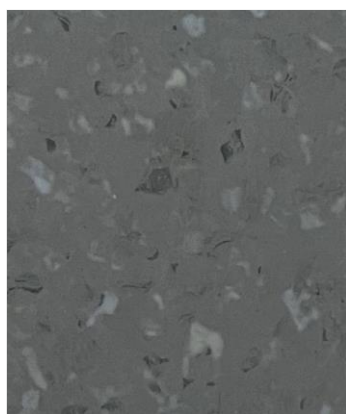

FA-3012

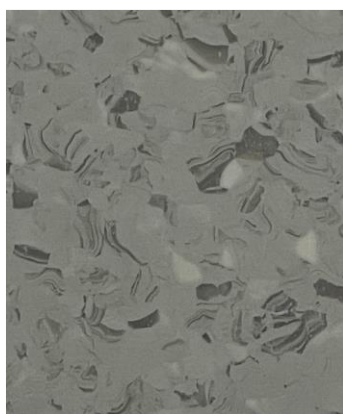

FA-3013

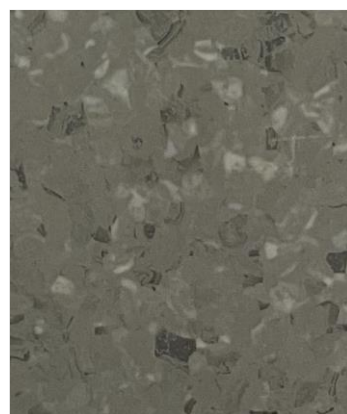

FA-3018

Technical Specification

HOMOGENEOUS VINYL FLOORING / ANTI-STATIC

Product Specification

Type of flooring	EN649	
Classification	ISO 10874 EN685 NTE INEN-ISO 26986	23/34/43
Size	EN426	2m*20m
Thickness	EN428	2.0mm,2.5mm,3.0mm
Weight	EN430	2.0mm;2850g/m2

Product Performance

Wear Group	EN660	T
Residual Indentation	EN433	0.03mm
Dimensional Stability	EN434	≤0.05%
Resistance to Chemicals	EN423	Very Good
Reaction to Fire	EN13501-1	Bfl-s1
Electrical Behavior	EN1815	≤2kV
Impact Sound Reduction	EN ISO717/20Lw	Approx.+4dB
Color Fastness to Light	EN ISO 105-B02	≥6
Mold Resistance	DIN EN ISO 846-A/C	No Bacterium
Slip Resistance	DIN 51130	R9
Hazardous, Substance, Testing	GB 18586-2001	Good



CONSTRUPISOS Y VINILOS SAS

Calidad y cumplimiento

**HETEROGENEOUS VINYL
FLOORING**




AUSTRALIA 1

HETEROGENEOUS FLOOR



FA051-298



FA051-255




FA051-292



FA051-213



FA051-285




FA051-244




FA051-235



FA051-252



FA046-226



FA046-417



FA046-446



FA046-465



FA046-422



FA046-474



FA046-442



FA046-462

AUSTRALIA 2

HETEROGENEOUS FLOOR



FA126-765



FA126-761



FA126-752



FA0126-742



FA126-735



FA126-744




FA126-733



FA126-712



FA126-282



FA126-401



FA126-691



FA126-692



FA126-281



FA126-465



FA126-6906



FA126-690

VIVALDI 1

HETEROGENEOUS FLOOR



FA-20801



FA-20802



FA-20807



FA-20808



FA-20811



FA-20804



FA-20810



FA-20809



FA-20806



FA-20805

VIVALDI 2

HEREROGENEOUS

FLOOR



FA-2061



FA-2062



FA-2064



FA-2066



FA-2063



FA-2071



FA-2072



FA-2069

Technical Specification

HETEROGENEOUS VINYL FLOORING

Product Specification

Type of flooring	EN649	
Classification	ISO 10874 EN685 NTE INEN-ISO 26986	34/43
Size	EN426	2m*20m
Thickness	EN428	2.0mm
Weight	EN430	2.0mm;2850g/m2

Product Performance

Wear Group	EN660	T
Residual Indentation	EN433	≤0.10
Dimensional Stability	EN434	≤0.05%
Resistance to Chemicals	EN423	Very Good
Reaction to Fire	EN13501-1	B1(B-s1,t0)
Electrical Behavior	EN1815	≤2KV
Impact Sound Reduction	EN ISO717/20Lw	Approx.+4dB
Color Fastness to Light	EN ISO 105-B02	≥6
Mold Resistance	DIN EN ISO 846-A/C	No Bacterium
Slip Resistance	DIN 51130	R9
Hazardous, Substance, Testing	GB 18586-2001	Good




CONSTRUPISOS Y VINILOS SAS

Calidad y cumplimiento

CONDUCTIVE VINYL FLOORING

ROYAL CONDUCTIVE FLOOR COVERINGS /2.0

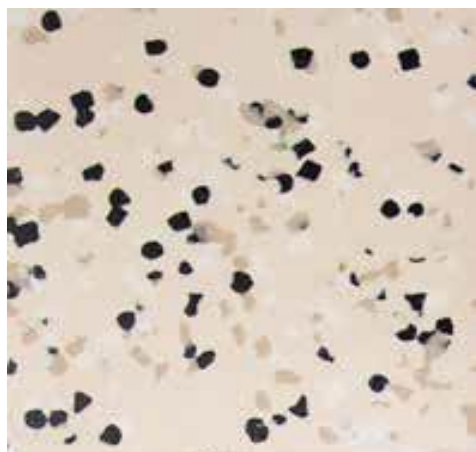


RC-1502



RC-1500




RC-1501

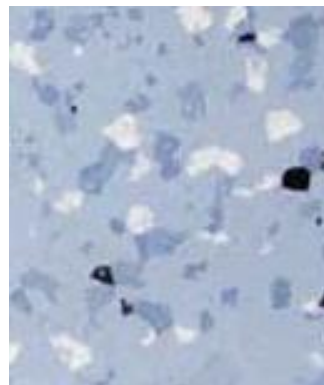


RC-1522




RC-1505

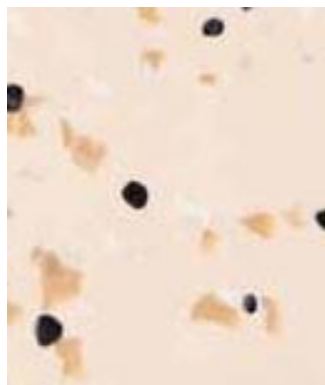


RC-1506

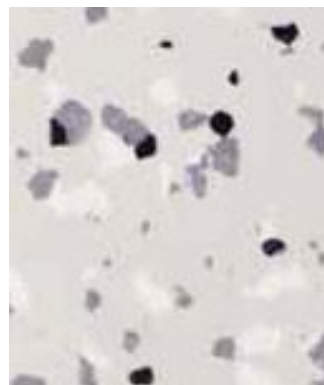


RC-1507

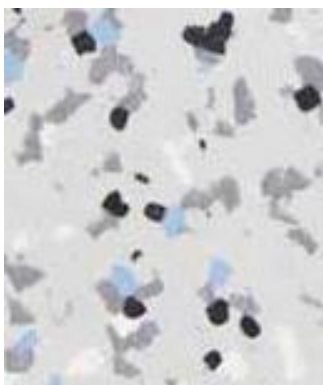

RC-1508

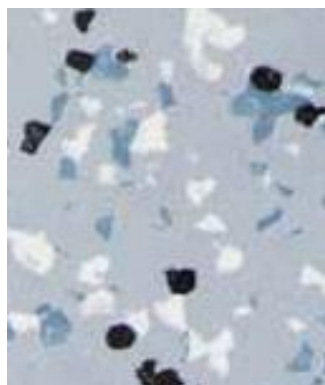


RC-1509

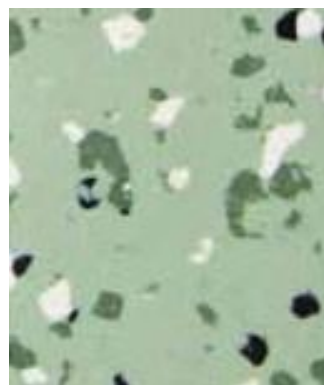


RC-1510

ROYAL CONDUCTIVE FLOOR COVERINGS /2.0

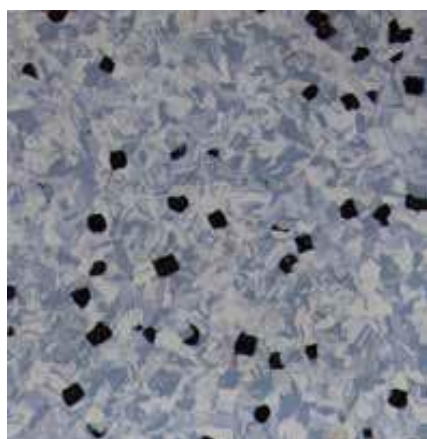

RC-1520

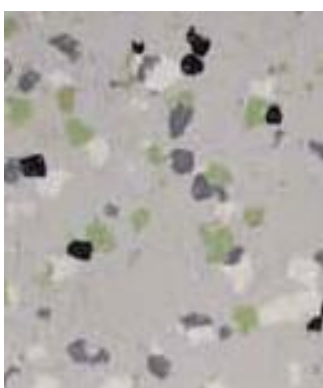


RC-1511




RC-1512




RC-1513

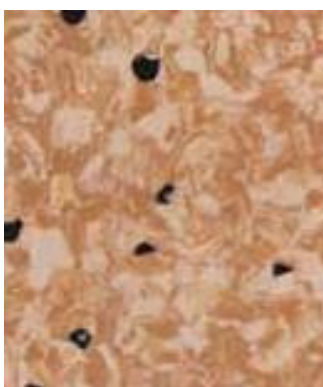


RC-1515

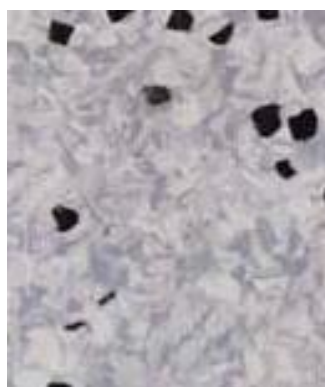


RC-1516

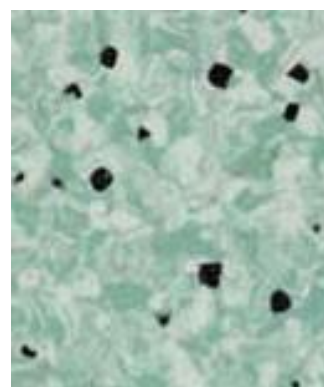

RC-1517

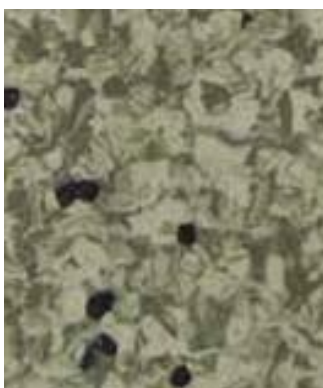

RC-1518

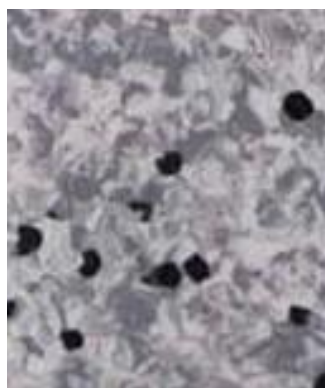

RC-1519



RC-1521

Technical Specification

CONDUCTIVE VINYL FLOORING

Product Specification

Type of flooring	EN649	
	ISO 10874 EN685	
Classification	NTE INEN-ISO 26986	23/34/43
Size	EN426	2m*20m
Thickness	EN428	2.0mm,2.5mm,3.0mm
Weight	EN430	2.0mm;2850g/m2

Product Performance

Wear Group	EN660	T
Residual Indentation	EN433	0.03mm
Dimensional Stability	EN434	≤0.05%
Resistance to Chemicals	EN423	Very Good
Reaction to Fire	EN13501-1	Bfl-s1
Electrical Behavior	SJ/T11236-EN1081-0hm	Conductive $10^4 \leq R \leq 10^6$
Impact Sound Reduction	EN ISO717/20Lw	Approx.+4dB
Color Fastness to Light	EN ISO 105-B02	≥6
Mold Resistance	DIN EN ISO 846-A/C	No Bacterium
Slip Resistance	DIN 51130	R9
Hazardous, Substance, Testing	GB 18586-2001	Good



CONSTRUPISOS Y VINILOS SAS

Calidad y cumplimiento

VINYL WALL

LUGANO

VINYL WALL




15610 Eggshell




15620 Cornsilk




15622 Light Leather



15602 Silk Gray

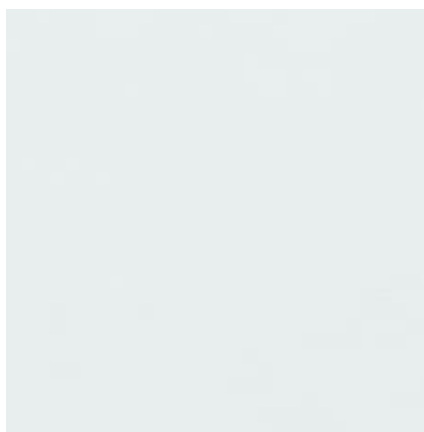

15650 White Gray

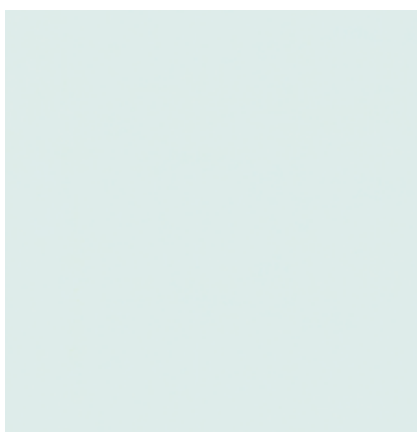

15660 Blue Reflection

Technical Specification

VINYL WALL

Product Specification

Type of flooring	EN649	
Classification	EN685	34/43
Size	EN426	2m*20m
Thickness	EN428	1.5mm
Weight	EN430	1.5mm;1900g/m2

Product Performance

Wear Group	EN660	T
Residual Indentation	EN433	0.04mm
Dimensional Stability	EN434	≤0.40%
Resistance to Chemicals	EN423	Very Good
Reaction to Fire	EN13501-1	B1
Electrical Behavior	EN1815	≤2KV
Impact Sound Reduction	EN ISO717/20Lw	Approx. 4dB
Color Fastness to Light	EN ISO 105-B02	≥6
Mold Resistance	DIN EN ISO 846-A/C	No Bacterium
Slip Resistance	DIN 51130	R9
Hazardous, Substance, Testing	GB 18586-2001	Good





CONSTRUPISOS Y VINILOS SAS

Calidad y cumplimiento

construpisos.com